

The FP S-ENGuard W550 is an IIoT gateway in a compact wall mounted housing.

Mobile wireless options

The FP S-ENGuard Gateways can be equipped with a mobile wireless module as an option. Suitable SMA antennas are available as an option.

The mobile wireless options are coded via a suffix after the "W550" model designation.



Suffix	Supported mobile wireless networks
NB	2G / 3G (discontinued model, minimum order quantity required)
BB	2G / 3G / 4G

1 Main functions

Main functions	
Alarm and fault indicator	Automatic generation and sending of fault messages from message templates and current values (from PLC or Gateway). Actions can trigger up to 100 definable events depending on the time requirements. Address book with up to 100 addresses. 100 message texts, 100 alarms
Acknowledgement	Acknowledgement option for alarms and triggering of alarm chains if the acknowledgement does not arrive within a set time. Acknowledgement via SMS or e-mail possible.
Alarm chain	Multiple levels of alarm actions and receivers if alarm messages are not acknowledged in time. Alarm actions can be sent by SMS, e-mail or switching actions.
Event	Event, e.g.: Error, PLC communication interrupted, acknowledgement of an alarm. All actions in the Gateway are triggered by events.
SMS	Sending and receiving of SMS
E-mail	Sending and receiving of e-mail (SMTP)
Remote switching	Remote switching of the variable values of the connected controller by sending switching commands as SMS or e-mail to the Gateway. Password protection
Remote maintenance	Configuration of the Gateway and the connected PLC via an existing IP connection.
Security	Local and remote configuration can be protected using access rights.
Web-server	Integrated web-server for local access to web applications (e.g. for commissioning)
PLC protocols	More than 30 integrated PLC and field bus protocols; direct access to PLC data points (read/write), e.g. Siemens, ABB, Mitsubishi, Moeller/Eaton, Allen-Bradley, Schneider, Crouzet, VIPA, ...
Counter protocols	Many integrated field bus protocols, e.g. Modbus, M-Bus, EN 61107, 1-Wire, Aurora, wMBus via optional FP wMBus adapter, ...
EDGE functions	Extensive data handling functions (EDGE computing) integrated by users in a freely programmable way, e.g. logical links, thresholding
Data logging	Large integrated log memory (power failure fail-safe due to flash memory) Up to 100 MB of log memory available for user data; up to 100 log files definable
Cloud protocols	Cloud protocols integrated from notable Cloud providers incl. Cloud command channel -> Gateway e.g. Deutsche Telekom CoT, Cumulocity, AWS, Juconn, generic MQTT
Security Protocols	TLS 1.2, VPN, your own certificates and keys can be configured FTP, SFTP, SMTP, POP3, SMS, MQTT, http, https, telnet, and more

2 System architecture

System architecture	
CPU	400 MHz, ARM9, ATMEL SAM9-G25
RAM	128 MB DDR2-RAM
FLASH Memory	128 MB on-board
System clock (Battery-backed)	For logging of events, e.g.: <ul style="list-style-type: none"> - Errors - incoming calls, - PLC or Cloud communication interrupted, - acknowledging an alarm All actions in the Gateway are triggered by events.

3 Interfaces

Serial interfaces	
COM1 RS232	5-pin screw connection max. 230,400 bps, not galvanically isolated ITU-T V.24, V.28, hardware handshake. Signals: RTS, CTS, GND, RxD, TxD Transmission distance: 12 m (39 ft)
COM2 RS485	3-pin screw connection, DTE in accordance with EIA/TIA-485, max. 230,400 bps, not galvanically isolated, integrated termination, can be switched via DIP switch Transmission distance of max. 1200 m (4000 ft) depending on the transmission rate, bus and cable type
COM3 M-Bus	Conformity: DIN EN 13757-2, DIN EN 13757-3 M-Bus master for up to 25 end devices (counter) short-circuit protection, galvanically isolated 1500 V M-Bus voltage: 36 V, bus length: max. 1000 m (3281 ft) 3 screw terminals, grid dimension 5.08 mm (0.2"), cross-section max. 1.5 mm ² (16 AWG) Data rate: 300 Baud – 19200 Baud Data formats: 8 data bits, 1 start bit, 1 stop bit and 1 parity bit (even parity)

Digital inputs	
2x digital inputs	Max. voltage: 24 V Not galvanically isolated

Digital outputs	
1x digital output	Max. voltage: 48 V; galvanically isolated

S0 Pulse inputs	
3x digital inputs	For pulse S0 counter, Reed contact input, battery-backed

USB 2.0 Host	
1x USB Host	For USB devices such as USB memory sticks, WiFi sticks, etc.

1-wire interface	
1x 1-wire	For the connection of 1-wire temperature sensors 5 V power supply for max. 30 sensors 3-pin screw connection

4 Ethernet connection

Ethernet connection	
Connection	10/100 Base-T IEEE 802.3, RJ45 connector (8P8C with 2 LEDs), shielded
Operating mode	Auto negotiation, Auto MDI-X (crossover cable not required)
Status LEDs	Flashing green Data is being transferred Yellow off 10 Base-T Yellow on 100 Base-T
Galvanic isolation	1500 V (V_{rms} min.)

5 S1 expansion modules (optional)

S1 expansion module			
An S1 plug-in module can be installed.			
Inputs	S1-D50	5x digital inputs, max. 24 V	-
	S1-D30G	3x digital inputs, galvanically isolated (0 .. +/- 60 V; input current 2.2 .. 3.1 mA)	-
	S1-AE3	3x analogue inputs 0 .. 10 V / 0 .. 20 mA (can be adjusted using jumpers)	0.2 % +/- 5 mV
	S1-PT3	3x Pt-1000 inputs; resolution 0.3K	+/- 1.2 K (2.16 °F)
	S1-PT3C	3x Pt-100 inputs; resolution 0.3K	+/- 1.2 K (2.16 °F)
	S1-S03	3x pulse inputs S0 for Reed contacts; cable length max. 30 m (98 ft)	-
Outputs	S1-D05	5x digital outputs, max. 48 V, 120 mA	-
	S1-D03G	3x digital outputs, galvanically isolated	-
	S1-WL2	2x changeover relay, max. 48 V / 3 A	-

6 WiFi stick (optional)

WiFi stick	
WiFi	USB stick model "90.0072.8100.00"
Wireless type	IEEE 802.11b/g/n; WPS (WiFi Protected Setup)
Frequency	1T1R 2.4 GHz
Data rates	IEEE 802.11b: 11 MBit/s max. IEEE 802.11g: 54 MBit/s max. IEEE 802.11n: 150 MBit/s max.
Network modes	Ad-hoc, infrastructure
Encryption	WEP-64, WEP-128, TKIP, WPA2
Antenna connection	Internal
Temperature range	0 .. 40 °C (32 .. 104 °F)

7 Operating elements

Operating elements	
Service buttons	Can be freely configured by the user via TiXML programming
Signal LED	Can be configured via TiXML (red/green flashing function, 32 patterns), e.g. "red = error" and "green = functioning properly"
Speakers	Mini speakers for audio signals; can be controlled using TiXML, e.g. continuous sound for alarm
System LEDs	Power, Process/Data out, LAN, Mode
WiFi buttons	For switching the WiFi subsystem on and off or for unloading (unmounting) a USB memory stick

8 Mobile wireless modem (optional)

UMTS/HSPA+: (2G, 3G) NB model	
Frequencies	Dual-mode UMTS (WCDMA) / HSDPA / EDGE / GPRS operation Dual Band 900 / 1800 MHz; UMTS Band 1 (2100 MHz), Band 8 (900 MHz)
EDGE features	Multi-Slot Class 12, E-GPRS Mobile Station Class B, Coding Schemes MCS 1-9; up to 236.8 kbps DL
GPRS features	Multi-Slot Class 12, GPRS Mobile Station Class B, Coding Schemes CS 1-4; up to 85.6 kbps DL/UL
UMTS features	UMTS Terrestrial Radio Access (UTRA) HSDPA category 8
GSM features	Call Forwarding, Call Barring, Multiparty, Call Waiting, Call Hold, Calling Line Identity Advice Of Charge, USSD, Closed User Group
Antenna	SMA socket (female), coaxial, impedance 50 Ω
Data transmission	GSM: CSD up to 9.6 kbps DL/UL GPRS: max. Downlink: 85.6 kbps, max. Uplink: 85.6 kbps EDGE: max. Downlink: 236.8 kbps, max. Uplink: 70.4 kbps UMTS: max. Downlink: 384 kbps, max. Uplink: 384 kbps HSDPA: category 8: max. 7.2 Mbps DL (peak rate) HSUPA category 6: 5.76 Mbps UL Transmission power: 2 W GPRS/GSM/E-GSM @ 900 MHz 1 W GPRS/GSM/E-GSM @ 1800 MHz 0.5 W EDGE/GSM/E-GSM @ 900 MHz 0.4 W EDGE/GSM/E-GSM @ 900 MHz 0.25 W WCDMA/HSDPA/HSUPA @ 800/850/1900/2100 MHz

LTE: (4G) BB model	
Frequencies	8-Band LTE (B1, B2, B3, B5, B7, B8, B20; all bands with diversity) Quad Band 3G (850, 900 1800, 1900 MHz) Quad Band 2G (850, 900 1800, 1900 MHz)
Antenna	SMA socket (female), coaxial, impedance 50 Ω
Data transmission	WCDMA CS: Downlink: 64 kbps, Uplink: 64 kbps GPRS: Downlink: 85.6 kbps, Uplink: 85.6 kbps EDGE: Downlink: 236.8 kbps, Uplink: 236.8 kbps WCDMA PS: Downlink: 384 kbps, Uplink: 384 kbps HSPA+: Downlink: 21.6 Mbps, Uplink: 5.76 Mbps DC-HSPA+: Downlink: 43.2 Mbps, Uplink: 5.76 Mbps LTE FDD: Downlink: 150 Mbps, Uplink: 50 Mbps @ 20M BW cat4 Transmission power: 2 W GSM-GPRS @ 850/900 MHz 1 W GSM-GPRS @ 1800/1900 MHz 0.5 W EGPRS @ 850/900 MHz 0.4 W EGPRS @ 1800/1900 MHz 0.25 W UMTS @ 850/900/1900/1950 MHz 0.2 W LTE @ 800/850/900/1700/1800/1900/1950/2100 MHz

9 Firmware


Firmware	
TECom	Tixi Embedded Communication System TECom TECom provides all basic functions which are required for close communication with controllers and remote communication in telephone networks, mobile wireless networks, LAN, Wi-Fi and IP based networks.
Operating system	Embedded Linux
File system	UBIFS: Log data and process variables (in RAM) remain in flash memory in the event of a power failure
OEM functions	The firmware can be expanded for OEM customers, e.g. for: New control protocols, calculating or processing functions or web server functions.
Data security	Use of the industry standard libraries Open SSL (TLS 1.2) and OpenVPN

10 General data

Power supply	
Standard device	110 .. 240 V AC, 50 .. 60 Hz PTC overcurrent protective device (Polyswitch); triggers at 2 A <u>Typical power consumption</u> W550 LAN: 9 W W550 NB / W550 BB: 14 W 3 screw terminals; conductor cross section max. 1.5 mm ² (16 AWG) Use copper (CU) conductors only! Fuse protection with a circuit breaker of type max. 10A, characteristic B, switching capacity 6kA required in the electrical system of the building - Fuse protection must be carried out in phase (L) A two-pole (L, N) disconnecting device with a minimum contact distance of 3 mm (0.12") is required in the electrical system of the building - Disconnecting device must be easy to access for service personnel
Backup battery	CR2032 backup battery for RTC (real time clock), service life >= 10 years, replacement by the user not intended
System backup battery (optional)	Slot for optional re-chargeable system backup battery. Running time 30 .. 90 minutes. Battery type: 3,7V / 750 mAh


Housing	
Installation	Wall mounting with screws (screws not included in scope of delivery)
Type	FP S-ENGuard W550
OEM housing	OEM wall mounted housing
Dimensions WxHxD	231 mm x 158 mm x 60 mm (9.1" x 6.2" x 2.4") (incl. cable gland)
Weight	W550 LAN: approx. 650 g (1 lb 6.9 oz), W550 NB / BB: approx. 660 g (1 lb 7.3 oz)

11 Conformity

Conformity and use	
Conformity	 2014/53/EU Radio Equipment Directive RED 2011/65/EU RoHS 2012/19/EU WEEE
Temperature range	Operation: -25 °C .. +55 °C (-13 °F .. 131 °F) Storage: -25 °C .. +85 °C (-13 °F .. 185 °F)
Permitted humidity	5 .. 95 % relative humidity, non-condensing
Protection class	IP65
Electromagnetic compatibility	Class B

12 Dimensions

Dimensions (incl. cable ducts): 231 mm x 158 mm x 60 mm (9.1" x 6.2" x 2.4")

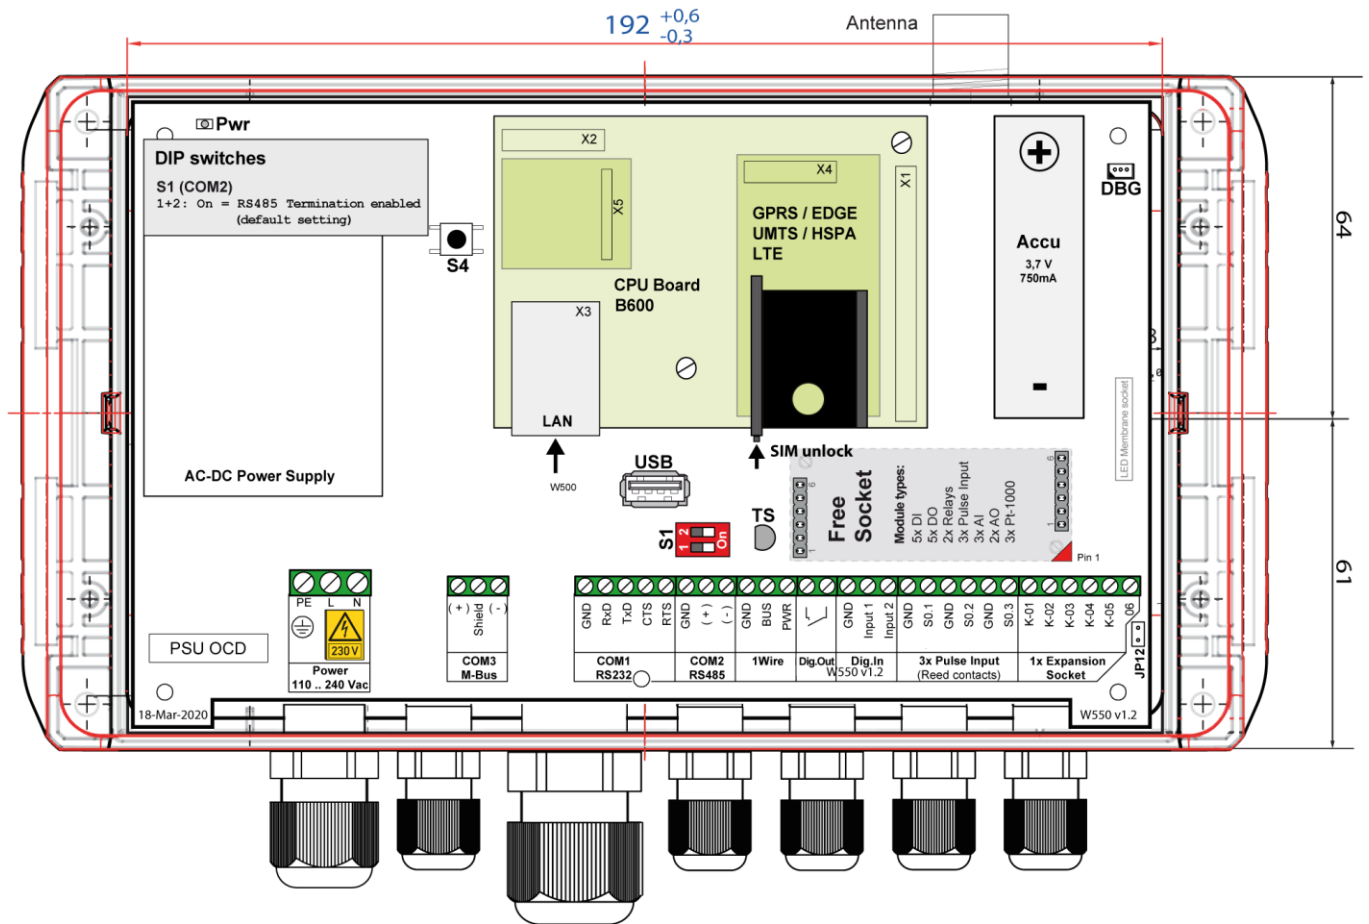

Contact

FP NeoMonitor GmbH
 Prenzlauer Promenade 28
 D - 13089 Berlin

Tel.: +49 - 30 – 220 660 601
 Email: info@neomonitor.de
 Web: www.neomonitor.de

Disclaimer

This datasheet was created and checked with great care and replaces all previously published versions. The data is based on the technical information known at the time of creation. Nevertheless errors cannot be ruled out. We reserve the right to make changes that serve technical progress.